# Pima-TRIO®

Three Aluminium alloy blocks of 32 wells compatible with 0.2ml PCR tubes



LA1006

with "Three independently controlled blocks"






# Prima-TRIO®



HiMedia Laboratories Pvt. Ltd. is the one of the world leading manufacturers for serving science. Our mission is to develop innovative technologies and provide comprehensive services to accelerate scientific discovery.

The Prima-TRIO<sup>®</sup> Thermal Cycler delivers proven unparallel reliability combined with best in class features to meet your today's and tomorrow's PCR needs.

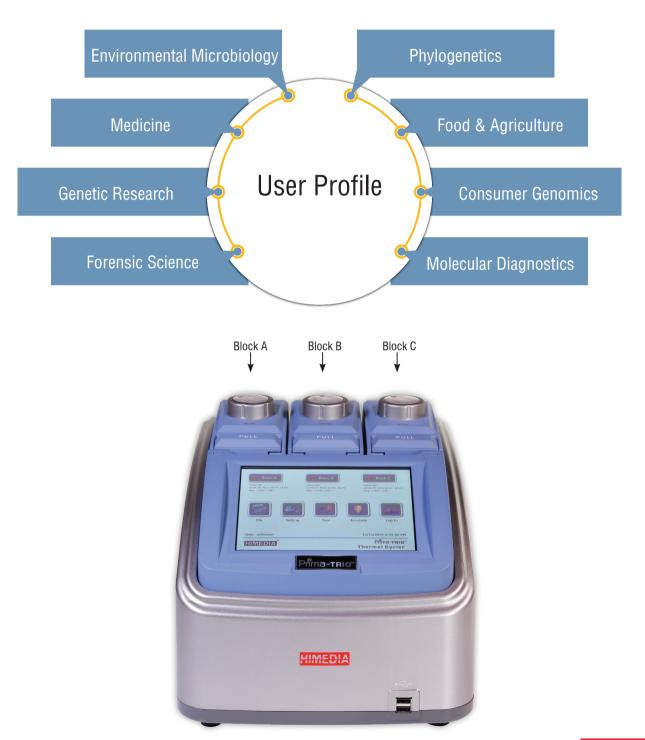




## Prima-trio®



### **Salient Features**

- 1) This PCR machine has 3 independent blocks. Each thermal block has 8 thermal gradient temperatures across 4 columns and peltier heating units to ensure accurate and uniform temperature across the block surface; helps users to replicate previous condition set-up.
- 2) 8"TFT color touch- screen with graphical display provides easy use for setting up and monitoring.
- 3) The actual and target temperature can be viewed and displayed graphically in real time.
- 4) Built-in 11 standard program file templates: Touchdown, Standard, Nested Primer, iTaq, iScript, iProof, Gradient can quickly edit the required files.
- 5) Internal flash memory for 10000 typical PCR files in free configurable folders.
- 6) Automatic restart after power failure
- 7) Dynamic ramping keeps incubation times constant
- 8) Compatible with devices such as mouse and keyboard and capable to transfer data and perform software updates via USB drive.
- 9) Compatible with 0.2ml tube, 0.2 ml PCR 8 strip tubes, 0.2 ml non-skirted & semi-skirted plates.
- 10) Simultaneously control up to 11 pcr system by connecting single Ethernet Hub.
- 11) A convenient USB port is outfitted on systems for data transfer & product updates.
- 12) User password protected : secure system access
- 13) GLP report records every step to provide accurate data support for experiment result analysis
- 14) One click quick incubation function
- 15) System is capable of testing temperatures at denaturation, Annealing & extension steps.

#### **Performance data**



Data of three same PCR programs ran simultaneously in blocks A,B & C of  $\,$  Prima-TRIO  $\,$  machine

#### **PCR Related Reagents**

#### **Reverse Transcription Enzymes**

**MBT072** 

Reverse Transcription Enzymes		
MBT060	MBT060D	MBT069
MBT060A	MBT060E	MBT070
MBT060B	MBT068	MBT088
MBT060C		

dNTPs			
MBT054	MBT057	MBT059	
MBT055	MBT058	MBT078	
MBT056	MBT079		

<b>PCR Enhancers</b>		
MBT085	MBT086	

PCR Master Mixes			
MBT061	MBT089	MBT119	
MBT095			







## **Specifications**

Product Name	
Troduct Name	Prima-Trio <sup>®</sup>
Sample capacity	32 x 0.2ml x 3 blocks
Peltier Number	6
Block material	Aluminum Alloy
Temperature Range(°C)	0-100°C
Heating Rate(°C/sec)	5°C / Sec
Cooling Rate(°C/sec)	4°C / Sec
Control Accuracy(°C)	≤ ± 0.2°C
Uniformity(°C)	≤ ± 0.3°C
Control Mode	Block, Tube
Hot-lid Temperature(°C)	30~110°C (step less adjustable)
Gradient Range(°C)	1-30°C
Gradient Temp Range(°C)	30~100°C
Reaction Volume Range	10-100 μl
Display Interface	8 inches, 800x600 Pixels, TFT, LCD Touch screen
Instrument Memory	10000 files + (USB Flash)
Auto restart facility	Yes
Temperature Time Increment / Decrement	Yes
Pause function	Yes
Edit File While Running	Yes
Support for USB Mouse & Touch screen	Yes
Touch calibration option	Yes
Tm Calculator	Yes
No of steps & cycles	30 steps & 100 cycles
Ramping Rate Adjustable	0.1~4.5°C
Temp. & Time Increment/Decrement	0.1~10.0°C ; 1 Sec ~ 600 Sec
Connection	USB 2.0, LAN
Network Control	Yes
Auto Data Protection	Yes
Preloaded Protocol	Yes
Input Voltage & Input Power	85~264VAC, 47~63Hz, 600 W
Footprint(DxWxH)	39x27x25.5 cm (15.3x10.6x10 inches)
Weight	9 kg (19.8 lb)
Standard Warranty	Limited Warranty
Certification	CE, ANVISA



#### HiMedia Laboratories Pvt. Ltd.

www.himedialabs.com

